

Contents

Terms & Conditions	02
<u>Low Loaders</u>	<u>04-08</u>
Standard (19T Gross)	04
Standard (16T Gross)	05
Mini Low Loader	06
Tri – Axle Low Loader (27T Gross)	07
Heavy Duty Tri Axle	08
<u>Dump Trailers</u>	<u>09-13</u>
8/10/12 Ton	09
14 Ton Hi Side Hi Speed	10
Rock Trailer	11
16 Ton	12
18/20 Ton Hi Speed	13
<u>Dump Loaders</u>	<u>14-15</u>
Standard Dump Loader	14
Mini Dump Loader	15
<u>Drop Side Trailers</u>	<u>16-17</u>
13ft x 7ft	16
14ft x 7ft 6”	17
<u>Bale Trailers</u>	<u>18-20</u>
Standard (19T Gross)	18
12 Tonne Bale Trailer	19
Mini Bale Trailer	20
<u>Livestock Trailers</u>	<u>21-22</u>
Standard	21
Lift off Body	22
<u>Gravel Trailer</u>	<u>23</u>
<u>Vacuum Tankers</u>	<u>24-27</u>
1600 - 3000 Recessed	24
1100 2000 Standard & Semi Recess	25
Trailing Shoe & Herbst Dribble Bar	26
Optional Extras for Vacuum Tankers	27
<u>Compac Screen S52</u>	<u>28-29</u>
<u>Compac Crusher</u>	<u>30-31</u>
<u>Agri Crusher</u>	<u>32-33</u>
<u>NEW Drop Bed Low Loader</u>	<u>34</u>
<u>Optional Extras</u>	<u>35</u>

Standard Low Loader (19T Gross)

Standard Features:

Heavy Duty Tow Eye

Running Gear 2 x 9,000 Kg (50Km/h) Heavy Duty Axle

Suspension Hi-Roc 7-leaf springs

All wheel hydraulic braking

New J Rated Tyres

Sprung Lowered Ramps

Floor 50mm kiln dried softwood

Mudguards front and rear

Side Crash Barriers



20Ft model shown

Model	20 Ft	24 Ft
Weight Unladen / Gross	3640 / 19,000	4100 / 19,000
Carrying Capacity	15,360	14,900
Overall Length / Width /Height	8450/2500/2300	9440/2500/2300
Wheel Size	215/75 17.5	215/75 17.5
Brake Size	300 x 90	300 x 90
Length of Flat Platform	4750	5750
Length of Beavertail	1620	1620
Ramp Length/Width	1650/600	1650/600
Height of Platform (Std Wheels)	930	930
Wheel Track Width	1850	1850

All low loader optional extras on page 35

Standard Low Loader (16 Ton Gross)

Standard Features

Heavy Duty Tow Eye
 Running Gear 2 x 9,000Kg (50 Km/h) Heavy Duty Axle
 Suspension Hi-Roc 7-leaf springs
 All wheel hydraulic braking
 New J Rated Tyres
 Wide sprung lowered ramps
 Floor 50mm kiln dried softwood
 Side Crash Barriers



20 ft model shown

Model	20 Ft	24 Ft
Weight Unladen / Gross	3100 / 16,000	3500 / 16,000
Carrying Capacity	12,900	12,500
Overall Length / Width / Height	8450/2500/2300	9440/2500/2300
Wheel Size	215/75 17.5	215/75 17.5
Brake Size	300 x 90	300 x 90
Length of Flat Platform	4750	5750
Length of Beavertail	1620	1620
Ramp Length/Width	1600/900	1600/900
Height of Platform (Std Wheels)	930	930
Wheel Track Width	1850	1850

All low loader optional extras on page 35

Mini Low Loader (10 Ton Gross)

Standard Features:

Heavy Duty Tow Eye
Running Gear 2 x 5,500Kg (50km/h) Axle
Suspension Hi-Roc 5-leaf springs
Hydraulic braking system
Adjustable Ramps
Steel Chequered Floor



Model	Mini L/Loader
Weight Unladen / Gross	2220 / 10,000
Carrying Capacity	7,780
Overall Length / Width /Height	7550 / 2340 / 2060
Wheel Size	400 / 60 15.5
Brake Size	300 x 60
Length of Flat Platform	4350
Length of Beavertail	1350
Ramp Length/Width	1500 / 520
Height of Platform (Std Wheels)	820
Wheel Track Width	1800

All low loader optional extras on page 35

Tri Axle Low Loader (27 Ton Gross)

Standard Features:

- Heavy Duty Tow Eye
- Sprung Drawbar
- Running Gear 3 x 9,000Kg (50km/h) Heavy Duty Axle
- Suspension Hi-Roc 7-leaf springs
- All wheel hydraulic braking
- 12" Chassis
- New J Rated Tyres
- Sprung lowered ramps
- Floor 50mm kiln dried softwood
- Mudguards front and rear
- Side crash barriers



Model with rotary towing eye shown

Model	Tri - Axle
Weight Unladen / Gross	4960 / 27,000
Carrying Capacity	22,040
Overall Length / Width /Height	9440 / 2500 / 2300
Wheel Size	215/75 17.5
Brake Size	300 x 90
Length of Flat Platform	5750
Length of Beavertail	1620
Ramp Length/Width	1650/600
Height of Platform (Std Wheels)	930
Wheel Track Width	1850

All low loader optional extras on page 35

Heavy Duty Tri Axle Low Loader

Standard Features

Heavy Duty Tow Eye
 Sprung Drawbar
 Running Gear 3 x 10 Stud Full Commercial Axle
 Suspension Hi-Roc 8-leaf springs
 Air / Hydraulic braking system
 Load Sensing Valve
 12" Chassis
 New J Rated Tyres
 Hydraulically operated ramps
 LED Beacon on each ramp with on/off switch
 Floor 50mm kiln dried softwood
 Steel well on trailer platform for outrigger timber
 12° Rounded Beavertail
 Mudguards Front and Rear
 Side crash barriers
 Pull - out outriggers
 Side Tool Box



Model	H/D Tri - Axle
Weight Unladen / Gross	6500 / 33,000
Carrying Capacity	26,500
Overall Length / Width /Height	9375 / 2500 / 2480
Wheel Size	235/75 17.5
Brake Size	310 x 190
Length of Flat Platform	6400
Length of Beavertail	1620
Ramp Length/Width	1800 / 600
Height of Platform (Std Wheels)	950
Wheel Track Width	1820

All low loader optional extras on page 35

8 / 10 / 12 Ton Dump Trailers

Standard Features:

Heavy Duty Towing Eye

80mm² 8 Stud Hubs on Boggies (10 & 12 Ton Only)

71° Tipping (Twin 3 Stage Rams)

Hydraulic Back Door (Single Acting, 1 Ram)

All wheel hydraulic braking



12 ton model with sprung drawbar option shown

Model	8 Ton	10 Ton	12 Ton
Weight Unladen / Gross	2080 / 10080	2450 / 12450	2760 / 14760
Cubic Capacity	4.75	5.2	6
Wheel size	385/65 22.5	385/65 22.5	385/65 22.5
Brake Size	300 x 90	350 x 60	350 x 60
Bin Thickness (Floor / Sides)	6mm / 6mm	6mm / 6mm	6mm / 6mm
Overall Length / Width / Height	4612 / 2200 / 2015	5000 / 2225 / 2070	5150 / 2225 / 2190
Body Length	3468	3797	3797
Loading Height (Floor to Top of Bin)	1765	1830	1940
Inside Bin Height	905	905	1010
Width of Bin at Top	2020	2020	2075
Width of Floor at Bottom	1350	1350	1425
Wheel Track Width	1850	1840	1920

All Dump Trailer optional extras on page 35

14 Ton High Side Dump Trailer

Standard Features:

Hi Side

Heavy Duty Towing Eye
Sprung Drawbar
90mm² 10 Stud Hubs on Boggies
71° Tipping (Twin 3 Stage Rams)
Hydraulic Back Door
(Single Acting, 2 Rams)
All wheel hydraulic braking
Mudguards and Mud Flaps

Hi Side / Hi Speed

Running Gear 2 x 10 Stud -
Hi Speed Axles (80kph)
Suspension Hi Roc -
9 Leaf Springs
Hydraulic Back Door -
(Double Acting, 2 Rams)
10" Chassis



14 ton Hi-Side model shown

Model	Hi Side	Hi Speed
Weight Unladen / Gross	3500 / 17,500	3750 / 17,750
Cubic Capacity	7	7.25
Wheel size	385/65 22.5	385/65 22.5
Brake Size	400 x 80	406 x 120
Bin Thickness (Floor / Sides)	6mm / 6mm	10mm / 6mm
Overall Length/Width/Height	5080/ 2440 / 2380	5400 / 2500 / 2380
Body Length	3797	3949
Loading Height (Floor to Top of Bin)	2070	2140
Inside Bin Height	1170	1170
Width of Bin at Top	2250	2250
Width of Floor at Bottom	1500	1500
Wheel Track Width	2020	1980

All Dump Trailer optional extras on page 35

Rock Trailer

Standard Features:

Heavy Duty Towing Eye

Sprung Drawbar

Running Gear 2 x 10 Stud / 9,000Kg (50kph) Heavy Duty Axles

Suspension Hi Roc 9 Leaf Springs

71° Tipping (Twin 3 Stage Rams)

Double Acting Hydraulic Drop Down Rear Door

Heavy Duty 12" Chassis

All wheel hydraulic braking

Mudguards and Mud Flaps



Model	14 Ton Rock
Weight Unladen / Gross	4600 / 18,600
Cubic Capacity	7
Wheel size	385/65 22.5
Brake Size	400 x 80
Bin Thickness (Floor / Sides / Rear Door)	10mm / 6mm / 10mm
Overall Length/Width/Height	5450/2500/2300
Body Length	4310
Loading Height (Floor to Top of Bin)	2160
Inside Bin Height	950
Width of Bin at Top	2060
Width of Floor at Bottom	2020
Wheel Track Width	2000

All Dump Trailer optional extras on page 35

16 Ton Dump Trailer

Standard Features:

Heavy Duty Towing Eye

Sprung Drawbar

100mm² 10 Stud Hubs on Boggies

71° Tipping (Twin 3 Stage Rams)

Double Acting Hydraulic Rear Door (2 Rams)

10" Chassis

All wheel hydraulic braking



Model shown with rotary tow eye & 445 wheel option

Model	16 Ton
Weight Unladen / Gross	4740 / 20,4740
Cubic Capacity	8
Wheel size	425/65 22.5
Brake Size	406 x 120
Bin Thickness (Floor / Sides)	10mm / 6mm
Overall Length/Width/Height	5600 / 2500 / 2500
Body Length	4297
Loading Height (Floor to Top of Bin)	2190
Inside Bin Height	1170
Width of Bin at Top	2330
Width of Floor at Bottom	1500
Wheel Track Width	2030

All Dump Trailer optional extras on page 35

18 / 20 Ton Dump Trailer

Standard Features:

- Heavy Duty Towing Eye
- Sprung Drawbar
- Running Gear 2 x 10 Stud / 10,000Kg Commercial Axle
- Suspension Hi Roc 3 Leaf Parabolic
- 71° Tipping (Twin 3 Stage Rams)
- Double Acting Hydraulic Rear Door (2 Rams)
- Heavy Duty 12" Chassis
- All wheel hydraulic braking
- Mudguards and Mud Flaps



18 Ton model shown in John Deere Green

Model	18 Ton	20 Ton
Weight Unladen / Gross	5380/23380	5500/2550
Cubic Capacity	11	12.68
Wheel size	425/65 22.5	425/65 22.5
Brake Size	420 x 180	420 x 180
Bin Thickness (Floor / Sides)	10mm / 6mm	10mm / 6mm
Overall Length/Width/Height	6350 / 2500 / 2590	6350 / 2500 / 2730
Body Length	4850	4850
Loading Height (Floor to Top of Bin)	2350	2490
Inside Bin Height	1100	1240
Width of Bin at Top	2200	2200
Width of Floor at Bottom	2100	2100
Wheel Track Width	2030	2030

All Dump Trailer optional extras on page 35

Standard Dump Loader (10 Ton)

Standard Features:

Heavy Duty Towing Eye

Running Gear 2 x 9,000Kg (50 Km/h) Heavy Duty Axle

Suspension Hi-Roc 7-leaf springs

71° Tipping (Twin 3 Stage Rams)

All wheel hydraulic braking

Support Stool for loading

Slide away ramps



Model with extra LED lights shown

Model	Std (10 Ton)
Weight Unladen / Gross	3500 / 13,500
Cubic Capacity	5.1
Wheel size	435/50 19.5
Brake Size	300 x 90
Bin Thickness (Floor / Sides)	6mm / 6mm
Overall Length/Width/Height	5820 / 2470 / 1570
Body Length	4320
Loading Height (Floor to Top of Bin)	1550
Inside Bin Height / Width	570 / 2340
Width of Floor at Bottom	2340
Wheel Track Width	1850
Ramp Length / Width	2800 / 350

All Dump Loader optional extras on page 35

Mini Dump Loader (6 Ton)

Standard Features:

Heavy Duty Towing Eye

Running Gear 2 x 5,500Kg (50km/h) Axle

Suspension Hi-Roc 5-leaf springs

71° Tipping (Single 3 Stage Ram)

All Wheel Hydraulic Braking

Slide Away Ramps



Model	Mini (6 Ton)
Weight Unladen / Gross	2450 / 10,000
Cubic Capacity	3.2
Wheel size	400/60 15.5
Brake Size	300 x 60
Bin Thickness (Floor / Sides)	6mm / 6mm
Overall Length/Width/Height	5000 / 2270 / 1380
Body Length	3680
Loading Height (Floor to Top of Bin)	1380
Inside Bin Height / Width	400 / 2150
Width of Floor at Bottom	2150
Wheel Track Width	1800
Ramp Length / Width	2380 / 350

All Dump Loader optional extras on page 35

8 Ton Dropside Trailer (13' x 7')

Standard Features:

Heavy Duty Towing Eye

80mm² 6 Stud Hubs on Boggies

Hydraulic Braking System

Single 3 Stage Tipping Ram

Heavy Duty Removable Drop Down Sides & Rear Door



Model shown in New Holland Blue

Model	13' x 7'
Weight Unladen / Gross	2100 / 10,100
Cubic Capacity	4.2
Wheel size	400/60 15.5
Brake Size	300 x 60
Floor Thickness	6mm
Overall Length/Width/Height	5355 / 2110 / 1500
Body Length	4000
Loading Height (Floor to Top of Bin)	1500
Inside Bin Height / Width	510 / 2010
Width of Floor at Bottom	2010
Wheel Track Width	1800

All Dropside Trailer optional extras on page 35

10 Ton Dropside Trailer (14' x 7'6")

Standard Features:

Heavy Duty Towing Eye

Sprung Drawbar

90mm² 8 Stud Hubs on Boggies

Hydraulic Braking System

Single 3 Stage Tipping Ram

Heavy Duty Removable Drop Down Sides & Rear Door



Model	14 x 7'6"
Weight Unladen / Gross	2600 / 12,600
Cubic Capacity	4.9
Wheel size	435/50 19.5
Brake Size	350 x 60
Floor Thickness	6mm
Overall Length/Width/Height	5645 / 2340 / 1600
Body Length	4270
Loading Height (Floor to Top of Bin)	1600
Inside Bin Height / Width	600 / 2200
Width of Floor at Bottom	2200
Wheel Track Width	1900

All Dropside Trailer optional extras on page 35

Bale Trailer (19 T Gross)

Standard Features:

- Heavy Duty Towing Eye
- Running Gear 2 x 9,000Kg (50km/h) Heavy Duty Axle
- Suspension Hi-Roc 7-leaf springs
- All Wheel Hydraulic Braking
- Floor 50mm kiln dried softwood
- Hay Racks Front & Rear
- Mudguards Front & Rear
- Side crash barriers
- Rope Hooks



24 Ft Model shown with sprung drawbar

Model	20'	22'	24'	26'	28'	30'	32'
Weight Unladen / Gross	2660/ 19000	3000/ 19000	3340/ 19000	3680 / 19000	4020 / 19000	4660/ 19000	5060/ 19000
Carrying Capacity	15000	15000	15000	15000	15000	15000	15000
Overall Length / Width / Height (Std Hayracks)	7725 / 2500 / 2250	8350 / 2500 / 2250	8970 / 2500 / 2250	9590 / 2500 / 2250	10215 / 2500 / 2250	10840 / 2500 / 2250	11460 / 2500 / 2250
Wheel Size	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50
	19.5	19.5	19.5	19.5	19.5	19.5	19.5
Brake Size	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90
Platform Length / Height (Std Wheels)	6225/ 1070	6850/ 1070	7470/ 1070	8090/ 1070	8715/ 1070	9340/ 1070	9960/ 1070
Wheel Track Width	1850	1850	1850	1850	1850	1850	1850
Chassis Depth	8"	8"	8"	8"	8"	12"	12"

All Bale Trailer optional extras on page 35

12 T Bale Trailer

Standard Features:

- Heavy Duty Towing Eye
- Sprung Drawbar
- Running Gear 2 x (50km/h) Heavy Duty Axle
- Suspension Hi-Roc 7-leaf springs
- All Wheel Hydraulic Braking
- 2 Ft Headboard
- Hay Ladders (Front & Rear)
- Steel Chequered Floor
- Rope Hooks



28' Model shown with Side Tool Box

Model	25'	28'	30'	33'
Unladen Weight	3320	3820	4130	4550
Carrying Capacity	12000	12000	12000	12000
Overall Length / Width / Height (Std Wheels)	9580 / 2500 / 2650	10170 / 2500 / 2650	10795 / 2500 / 2650	11760 / 2500/ 2650
Wheel Size	385 / 65 22.5			
Brake Size	300 X 90			
Platform Length / Height (Std Wheels)	8080/1190	8670/1190	9295/1190	10260/1190
Wheel Track Width	1850			
Chassis	250 x 100 RHS			

All Bale Trailer optional extras on page 35

Mini Bale Trailer

Standard Features:

Heavy Duty Towing Eye
 Running Gear 2 x 5,500Kg (50km/h) Axle
 Suspension Hi-Roc 5-leaf springs
 Hydraulic Braking System
 Steel Chequered Floor
 Headboard
 Mudguards Front & Rear
 Hay Racks Front & Rear
 Rope Hooks



Model	18/1	18/2	20'	22'	24'	25'
Weight Unladen /	1700	1800	1980	2160	2350	2450
Carrying Capacity	8000	10000	10000	10000	10000	10000
Overall Length / Width / Height (Std Hayracks)	7130/ 2400/ 2160	7130/ 2400/ 2160	7740/ 2400/ 2160	8350/ 2400/ 2160	8970/ 2400/ 2160	9580/ 2400/ 2160
Wheel Size	400 / 60	400 / 60	400 / 60	400 / 60	400 / 60	400 / 60
	15.5	15.5	15.5	15.5	15.5	15.5
Brake Size	300 X 60	300 X 60	300 X 60	300 X 60	300 X 60	300 X 60
Platform Length / Height (Std Wheels)	5600/ 920	5600/ 920	6225/ 920	6850/ 920	7470/ 920	7780/ 920
Wheel Track Width	1800	1800	1800	1800	1800	1800
No. of Axles	1	2	2	2	2	2
Chassis Depth	8"	8"	8"	8"	8"	8"

All Bale Trailer optional extras on page 35

Livestock Trailer

Standard Features (22Ft—30Ft Models):

Heavy Duty Towing Eye

Sprung Drawbar

Running Gear 2 x 9,000Kg (50km/h) Heavy Duty Axle

Suspension Hi-Roc 7-leaf springs

All Wheel Hydraulic Braking

Steel chequered floor on trailer platform

Aluminium chequered floor on rear sprung door

Galvanised slurry box

Mudguards Front & Rear

Side crash barriers

Solid ribbed roof

18-20Ft: (Changes below)

Inspection door

Standard drawbar

Dividing gates

Running Gear 2 x 5,500Kg (50km/h) Axle

Aluminium sides

Suspension Hi-Roc 5-leaf springs



Model	18'	20'	22'	24'	26'	28'	30'
Weight Unladen / Gross	3460/ 15000	3700/ 15000	4100/ 19000	4540/ 19000	5000/ 19000	5460/ 19000	6160/ 19000
Overall Length / Width / Height	7125 /2470 /2970	7725 /2470 /2970	8350 /2470 /3020	8970 /2470 /3020	9590 /2470 /3020	10215 /2470 /3020	10840 /2470 /3020
Wheel Size	400 / 60	400 / 60	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50
	15.5	15.5	15.5	19.5	19.5	19.5	19.5
Brake Size	300 X 60	300 X 60	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90
Inside Width / Height	2300/ 2040	2300/ 2040	2300/ 2040	2300/ 2040	2300/ 2040	2300/ 2040	2300/ 2040
Wheel Track Width	1800	1800	1850	1850	1850	1850	1850
No. Of Dividing Gates	1	1	1	2	2	2	2

All Livestock optional extras on page 35

Livestock Trailer Lift off Body

Standard Features:

Heavy Duty Tow Eye
 Sprung Drawbar
 All wheel hyd. braking
 Headboard
 Rope hooks
 Solid ribbed roof
 Inspection door
 Dividing gates
 Aluminium sides
 Side crash barriers
 Galvanised slurry box
 Mudguards front & rear
 Steel chequered floor on trailer platform
 Aluminium chequered floor on rear sprung door



Running Gear 2 x 9,000 Kg Heavy Duty Axle
 Suspension Hi-Roc with 7-Leaf Springs (30 & 32Ft 8-Leaf Springs)



Model	20'	22'	24'	26'	28'	30'	32'
Weight Unladen / Gross	4000/ 19000	4400/ 19000	4840/ 19000	5300/ 19000	5760/ 19000	6560/ 19000	7260/ 19000
Overall Length / Width / Height	7725 /2500	8350/ 2500	8970 /2500	9590 /2500	10215 /2500	10840 /2500	11460 /2500
(Incl. Cattle Body)	/3190	/3190	/3190	/3190	/3190	/3190	/3190
Wheel Size	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50	435 / 50
	19.5	19.5	19.5	19.5	19.5	19.5	19.5
Brake Size	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90	300 X 90
Platform Length / Width	6225/ 2500	6850/ 2500	7470/ 2500	8090/ 2500	8715/ 2500	9340/ 2500	9960/ 2500
(Excl. Cattle Body)							
Platform Height (Std Wheels & Excl. Cattle Body)	1010	1010	1010	1010	1010	1010	1010
Inside Width / Height	2200 /2030	2200 /2030	2200 /2030	2200 /2030	2200 /2030	2200 /2030	2200 /2030
(Incl. Cattle Body)							
Wheel Track Width	1850	1850	1850	1850	1850	1850	1850
No. of Dividing Gates	1	1	2	2	2	2	2

All Livestock optional extras on page 35

Gravel Trailer

Standard Features:

Heavy Duty Tow Eye

Running Gear 1 x 9,000Kg (50km/h) Heavy Duty Axle

All Wheel Hydraulic Braking System

Wheels 16.9 x 30'

Discharge to both sides

1 Metre Telescopic Chute to both sides

Mudguards and Mudflaps



Optional Extras:

Hydraulic Slides
Hydraulic Side Conveyor
Greedy Plates

Model	Gravel Trailer
Capacity	8000
Overall Length / Width / Height	4720 / 2520 / 2150
Body Length	3720
Top Opening	2820
Wheel Track Width	1850

Vacuum Tankers (Recessed)



Models:

Recessed

1600 / 2000 / 2250 / 2500 / 2750 / 3000 Gallon

Standard Features:

Rotary Tow Eye

Sprung Drawbar

Running Gear 10 Stud / 10,000Kg (50kph) Heavy Duty Axle

2 Fill Points with 6" Gate Valve & Quick Attach Complete

2 Blanked-off Fill Points

30" Back Door & Downsread

1 Wash Down Point

Sanitary Trap

20' Suction Hose

LED Lights

PTO Shaft



2500 Gallon Recessed Tanker Shown

Recessed	1600	2000	2250	2500	2750	3000
Unladen Weight	3150	3430	3690	3950	4280	4500
Capacity (Gallon)	1628	1996	2243	2477	2772	2962
Overall Length / Width / Height (Std Wheels)	5500 /2520 /3240	6500 /2640 /3240	7000 /2640 /3120	6720 /2630 /3220	7060 /2630 /3220	7400 /2630 /3220
Wheel Standard	28.1 R26	30.5 R32	30.5 R32	30.5 R32	30.5 R32 172 A8	30.5 R32 178 A8
Wheel Option	23.1 R26 30.5 R32	28.1 R26	28.1 R26	n/a	n/a	n/a
Cylinder Length / Diameter	3580/ 1676	4540/ 1676	5080/ 1676	4800/ 1829	5140/ 1829	5480/ 1829
Wheel Centre to Tow Eye	4120	5110	5160		5180	
Pump Capacity (Litres)	8000	11000	11000	11000	11000	11000

Vacuum Tankers (Standard & Semi Recess)



Models:

Standard

1100 / 1350 / 1600 / 2000 Gallon

Semi-Recess

(For 23.1 R26 wheels on a standard tank a recess is required)

1100 / 1350 / 1600 / 2000 Gallon

Standard Features:

Heavy Duty Tow Eye

Running Gear 1 x 8 Stud / 9,000Kg (50kph) Heavy Duty Axle

1 Fill Points with 6" Gate Valve & Quick Attach Complete

3 Blanked-off Fill Points

20" Back Door & Downspread

1 Wash Down Point

15Ft Suction Hose (2000 20Ft)

PTO Shaft

LED Lights



1350 Std. Tanker Shown

Standard	1100	1350	1600	2000
Unladen Weight	1635	1720	2100	2400
Capacity (Gallon)	1100	1350	1600	2100
Overall Length	5334	5334	6004	6840
Wheel Standard	550/60 x 22.5	550/60 x 22.5	550/60 x 22.5	21.3 R24
Wheel Option	15 x 22.5 21.3 R24 23.1 R26	21.3 R24 23.1 R26	21.3 R24 23.1 R26	23.1 R26
Cylinder Length / Diameter	3414/ 1372	3414/ 1524	4084/ 1524	4560/ 1676
Wheel Centre to Tow Eye	4030	4030	4570	4880
Pump Capacity (Litres)	8000	8000	8000	8000

Slotsmid Trailing Shoe



Standard Features:

Hydraulically driven cut and spread mill with stone divider
 Leaf springs that divide pressure proportionally across full width
 Working depth adjusted with chain and pin adjustment
 Automatic sequence valve for hydraulic functions
 Arms tilted 15° forward - hose closing system not required
 Transport width - 2.5 metre
 Fully Galvanised

Options:

Working widths range from 5 - 9 metres



Herbst 2250R tanker with Slotsmid trailing shoe shown

Herbst Dribble Bar



Working Widths:

7.5 metres
 8.5metres

Herbst 2500R tanker with dribble bar

Vacuum Tanker Optional Extras

Tank Extras

Fill & Discharge Options

Extra 6" / 8" fill point complete

Hydraulically operated fill point

Extra fill point blanked off

Extra quick attach only

8" fill point and 8" hose in lieu of 6"

20' suction hose in lieu of 15'

Extra 6" / 8" suction hose & fitting

6" / 8" autofill

6" / 8" autofill brackets

Hydraulic top hatch with ladder

Sludgigator & 8000 pump w/rain gun (1100 - 3000)

Hyd arm for umbilical system w/rain gun (1100-3000)

Hyd arm for umbilical system w/out rain gun (1100-3000)

Blanked off 4" gate valve from rain gun tube

12000 rain gun in lieu of 8000



Pump Options

Hydraulic Changeover on pump

Hydraulic 8000 litre pump upgrade

11000 Litre pump upgrade

13500 Litre pump upgrade



Other

Rotary Tow Eye (Standard & Semi Recess)

Sprung drawbar (Standard & Semi Recess)

Bracket only for Slootsmid Trailing Shoe

Air brakes

Stepped Axle

Ladder

Stone Trap

Extra sight glass

Sight tube at front

Sight level indicator (arrow)

Wide angle PTO in lieu of standard

Extra row of suction hose brackets

30ft / 52ft wash down kit

30" back door in lieu of 20"

20" / 30" door on side of tank

Mudguards on standard tank

Overwall 90 degree attachment

LED lights on mudguards

LED Beacon

Spot Light

Galvanising

Galvanised sprung drawbar

Galvanised drawbar & mudguards

Full Galvanising



Herbst Compac Screen S52

Features and Benefits:

- 4 cylinder air cooled diesel engine
- Variable speed belt feeder
- Hydraulically folding conveyors with excellent stockpiling capacity
- High performance 2 deck screen box
- Dog lead control
- Designed to fold up and track into a standard shipping container
- Designed for a wide range of materials and aggregates

Options:

- Grizzly Bofar Bar top deck
- Cordless radio remote track control
- Over band magnetic conveyor kit
- Dust suppression kit
- Customised Colour







S52 Screener

Track

Unladen Weight (Kg)	10,300
Transport Length (mm)	9460 (31'1")
Transport Width	2270 (7'6")
Transport Height	2260 (7'5")
Working Length	8911 (29'3")
Working Width	7333 (24'0")
Working Height	2536 (8'4")
Screen Unit (mm)	2135 x 1220 (7'x4')



Herbst Compac Screen S52 (Continued)

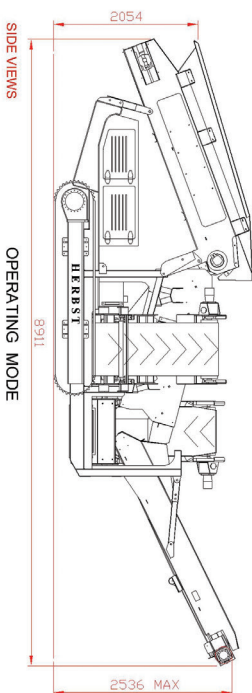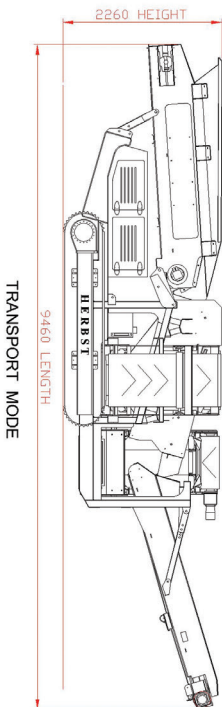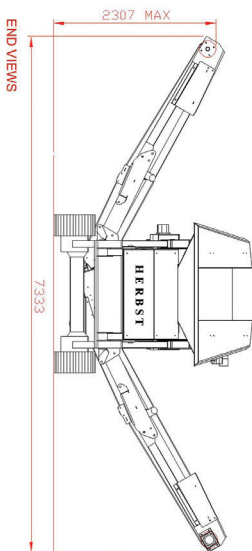

Herbst Compac Crusher



Features and Benefits:

- Belt fed hopper
- Fully skirted product conveyor
- Heavy duty chassis and track frame
- Removable discharge conveyor with hyd. jack legs
- Economic - highly fuel efficient direct drive system
- Crusher fitted with speed sensor
- Easy moved from site to site
- Dog lead remote control







Options

- Single pole/twin pole magnet
- Dust suppression system
- Radio remote control
- Belt weigher

Herbst Compac Crusher	
Unladen Weight (Kg)	16300
Transport Length / Width / Height	10639 (34'10") / 2124 (7') / 2970 (9'9")
Working Length / Width / Height	10639 (34'10") / 2124 (7') / 2970 (9'9")
Discharge Conveyor Length/Width/Height	(see drawings)
Track Width	2048 (6'9")
Feed Height	1997 (6'6")
Discharge Height	2450 (8')
Jaw size / Crush size	600 x 400 / 40 x 100

Herbst Compac Crusher (Continued)

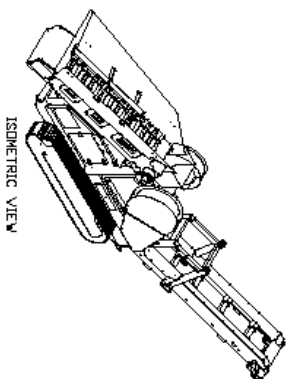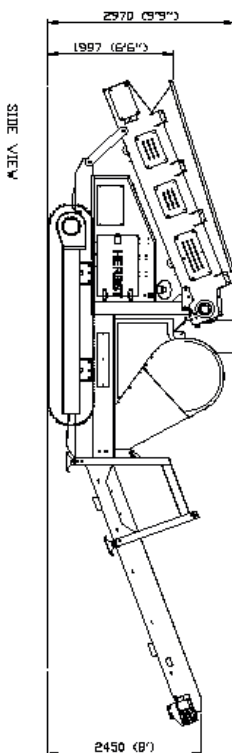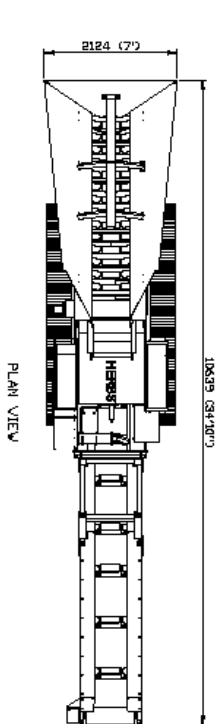

Herbst Compac Agri Crusher

Standard Features:


- PTO Tractor Driven Jaw Crusher
- Minimum Tractor Requirement - 100HP
- 700 x 400 Jaw
- Crush Size 40 -100
- HD Compact Chassis on Wheels
- Feed Hopper
- Manual, Hydraulic Operated Jaw Opening
- Crushing Speed Sensor, with Override Warning Signal
- Stability Legs - Hydraulic
- Removable Discharge Conveyor




Model	Agri Crusher
Unladen Weight (Kg)	7840
Transport Length / Width / Height (mm)	7350 (24' 2") / 2350 (7' 8") / 3100 (10' 2")
Working Length (mm)	7350 (24' 2") Plus Tractor Unit
Jaw Size (mm)	700 x 400 (28" x 16")
Crush Size (mm)	40 -100 (1½" - 4")
Hopper Width / Length (mm)	1870 (6' 2") / 1725 (5' 8")
Feed Height (mm)	2800 (9' 2")
Discharge Height (mm)	2000 (6' 7")

Herbst Compac Agri Crusher (continued)

FRONT VIEW

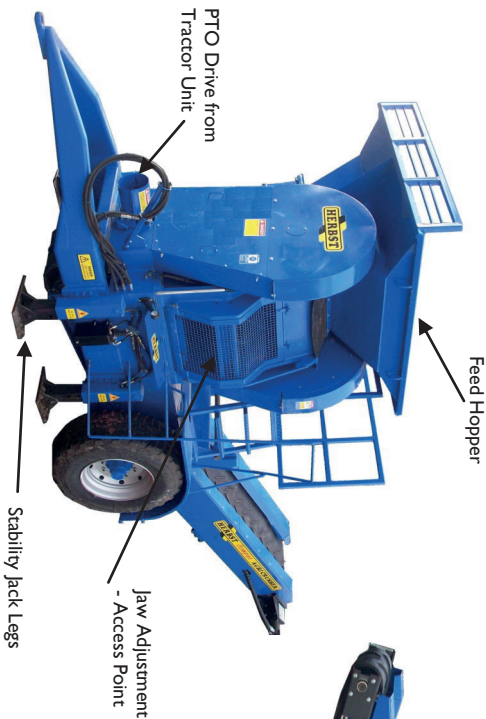

Service / Maintenance Access Platform

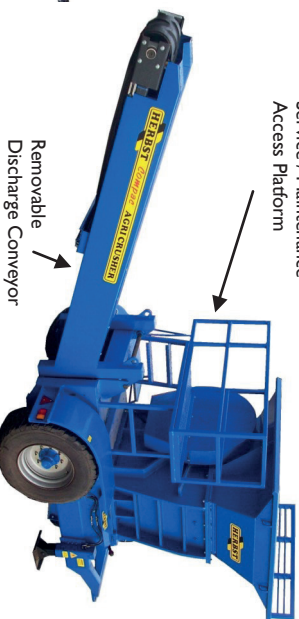

REAR VIEW

Drop Bed Low Loader

Standard Features:

- Payload 8,000Kg
- Heavy Duty Towing Eye
- 5m x 2.5m Flat Bed
- Steel Chequered Plate Floor
- Heavy Duty Axle (50km/h)
- 385/65 22.5 Super Single Wheels
- Hydraulic Operated Drop Bed
- Tool Box / Storage for Ramps
- Tie Bars & Rope Hooks



Model	Drop Bed
Unladen Weight	2520
Carrying Capacity	8000
Overall Length / Width / Height	8030 / 2500 / 1160
Wheel Size	385 / 65 22.5
Brake Size	300 X 90
Platform Length / Width	5050 / 2500
Platform Height - Loading / Transport	210 / 465
Wheel Track Width	1850
Ramps Length / Width	440 / 300

